



Capacity Diesel	10,000
Capacity Ad-Blue	2,000
Length	3812mm
Width	2175mm
Height	2350mm
Weight	3550 KG

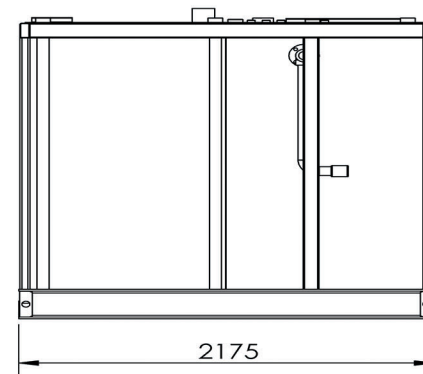

CERTIFICATIONS.

AS 1692-2006 Steel tanks for flammable and combustible liquids
 AS 1940-2004 The storage and handling of flammable and combustible liquids
 UL 142 Aboveground Flammable Liquid Tanks
 CAN/ULC-S601 Shop Fabricated Steel Aboveground Tanks For Flammable and Combustible Liquids,
 SANS 10131 Ed. 1 (2004)
 Above-ground Storage Tanks For Petroleum Products

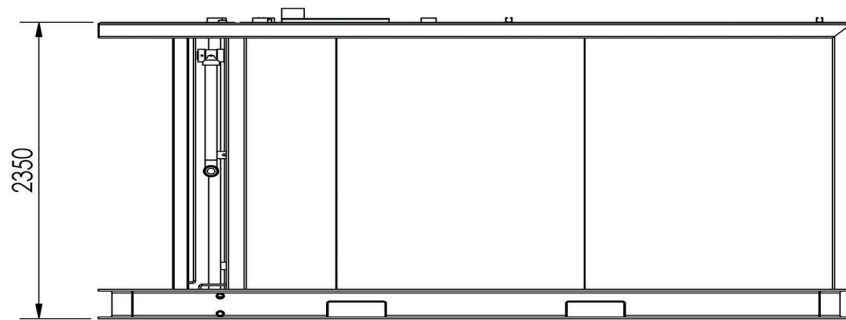

10,000 LITRE / 2000 LITRE
 DIESEL / AD-BLUE
 PORTABLE FUEL STATION



10,000 DIESEL / 2000 LITRE AD-BLUE PORTABLE FUELLING SYSTEM

OPTIONS
REMOTE ACCESS VIA INTERNET

Global Engineering Solutions multi compartment diesel / ad-blue self bunded storage tank is designed to minimize your footprint and maximize storage capacity.

Efficient Operation and Data Recording
online tank level monitor with Iphone App
110% containment removes the need for external bunding.
Includes management software and data keys
Information is retrieved via USB
Remotely operate the pumping equipment via mobile phone

Capacity
Safe fill level - 10,000 litres diesel.
Safe fill level - 1,900 litres ad blue
Large Capacity - up to 2000 users or vehicles

Premium Quality
15 year paint lifespan - externally blasted to class 2.5 and coated with Jotun products
German designed and manufactured fuel management system for each tank


Easy Customer Reconciliation
Saves time and money with each transaction, which includes
User identification
Vehicle identification
Odometer and engine hours
Time of filling
Fuel quantity

Safety
Failsafe overfill protection valves prevent filling spills
Factory pre-testing ensures maximum quality
Product level temperature monitoring
Controlled operation prevents pump burnout when fuel level gets too low

Audible and Visual Alarms
Indicates when product is too high or low
All alarms and reports are stored for reconciliation in the event of a problem.

Flow rates
Dispenser - 80 /160 litres per minute for diesel, fitted filter prevents fuel containments
40 litres per minute for Ad-blue


Pump - Single 1.5 HP submersible turbine ensures product is always delivered to the dispenser via pressure vs suction, so priming lines of an empty tank is not required.

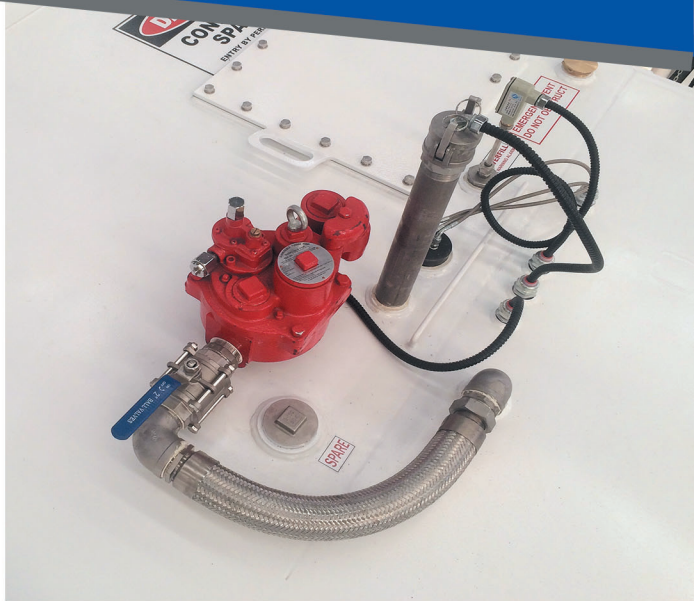

ONLINE TANK MONITORING AND CONTROL



GERMAN DESIGNED AND BUILT

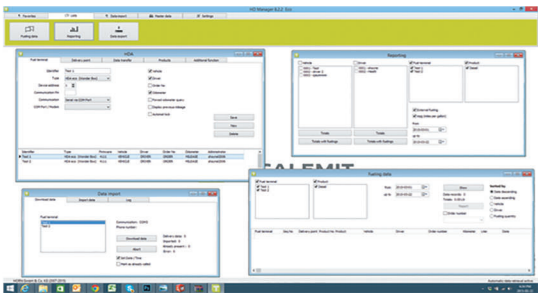

PC SOFTWARE INCLUDED



NOW WITH 80/160 LPM DISPENSING AS STANDARD

UP TO 2000 USERS AND VEHICLES, RFID TAGS INCLUDED